MRU AIR fair since 1984 ®
EMISSION MONITORING SYSTEMS

CO | CO_2 | CH_4 | H_2 | O_2 | N_2 | MJ/m^3 | MJ/kg

VARIO*luxx*

Portable syngas analyzer

Combined NDIR/EC/TCD measurement technology of main syngas components.

VARIO*luxx*

First choice for smart gas analysis

Suitable for semi - continuous measurement of syngas from coke ovens, blast furnaces, biomass, coal catalytic oxidation, waste- or plasma-gasification processes, steam reforming of liquid hydrocarbons (refinery gas, etc.).

With **VARIO*luxx,*** the simultaneous analysis of up to 5 syngas components is possible:

CO | CO_2 | C_4H | H_2 | O_2 | plus calculated N_2 and calorific value MJ/m^3 and MJ/kg

We offer you these special advantages:

- Integrated electrical gas cooler (Peltier) and automatic condensate draining pump
- Strong sample gas pump and externally accessible particulate Teflon filter
- Automatic zeroing by means of 3-way solenoid valve, user programmable
- Internal sample flow monitoring with display and alarm
- Use of long-life EC cell for O_2, NDIR for CO/CO_2/CH_4 and TCD for H_2 measurement
- Linux OS and large backlit 840x480 px clour display, with touch and swipe technique
- Lithium-ion battery operation, including gas cooler and measurement technology

The device in detail

An overview of the special features

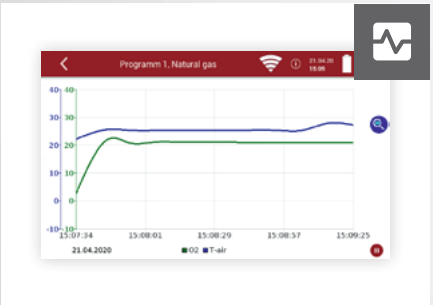

Practical touch & swipe display

High resolution 7" color display with graphical output of the measured values

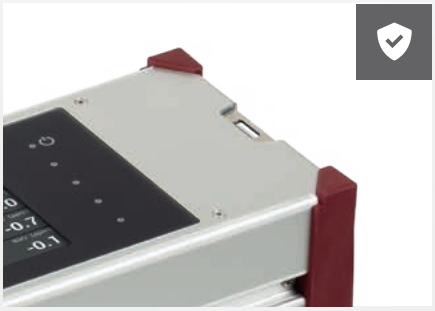

Optimal protection

All-metal housing with soft bumper corners for the harsh industrial everyday use

Comfortable size

Very compact dimensions (W x H x D: 430 x 290 x 150 mm) and light weight (8 kg)

On the go

Aluminum transport case with wheels or rugged „Pelicase“ style transport case

Operation and interfaces

Simple and clear

Operating options

Touchscreen

Device operation via the 7" touch/swipe display, resolution 800 x 480 px, 750 cd/m²

Wireless

Operation via smartphone or PC via VNC connection, mirrored device display on smartphone

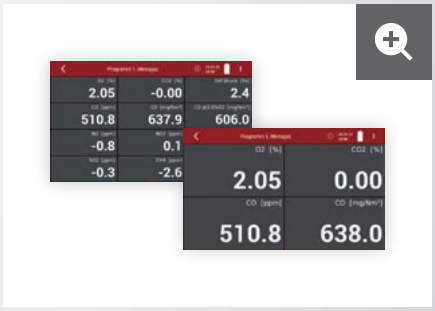

Zoom function

Scalable display mode for the display

Connections and interfaces

Measuring connections

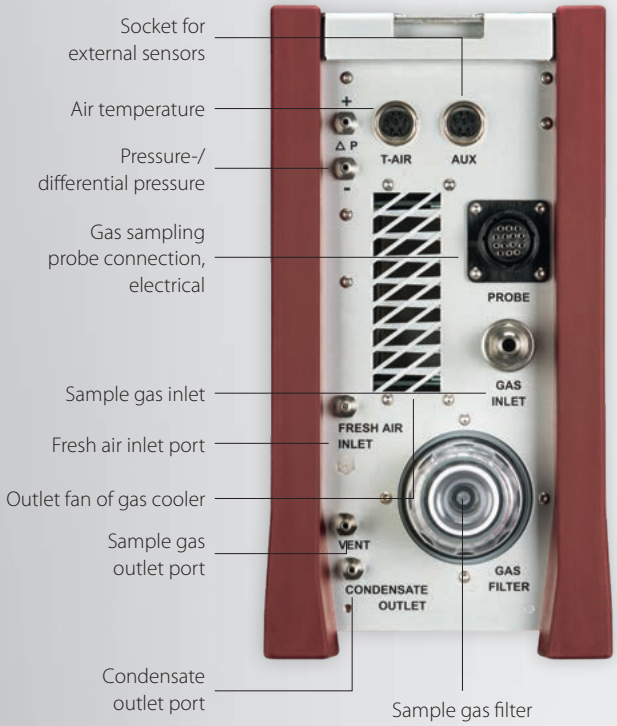

Data communication

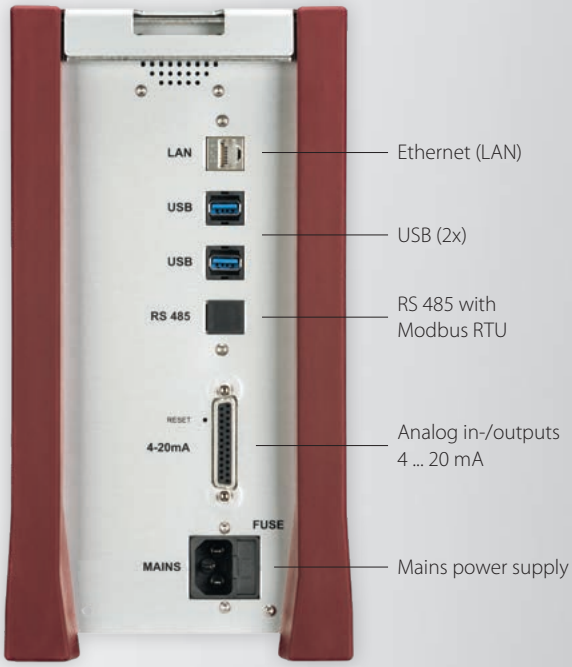

Gas conditioning for dirty syngas

Portable scrubbing device
for tar or heavy hydrocarbons removal

Gas sampling probe

- Robust industrial probe with heated filter, regulated by analyzer
- incl. gas temperature measurement, using K-type thermocouple
- Easy to change filter in the probe head
- Exchangeable probe tubes in various lengths

Peltier gas cooler
Automatic condensate pumps

Gas pump
Powerful pump for fast response times

Data transmission and measurement

The technology behind

Data transmission

Fully equipped standard device:

- Ethernet (LAN) TCP/IP
- WiFi
- 8 analog outputs 4 ... 20 mA
- 4 analog inputs
- USB (2x)
- RS 485 (option)

Internal data storage:

The huge memory with 400 MB offers space for thousands of facilities and data sets.

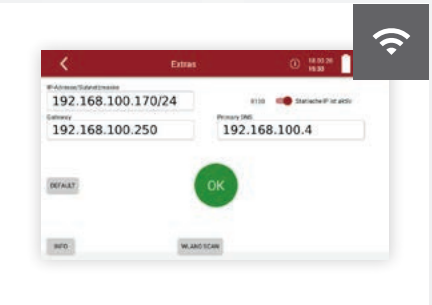

Set LAN

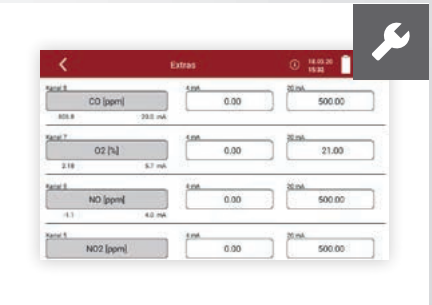

Set analog outputs

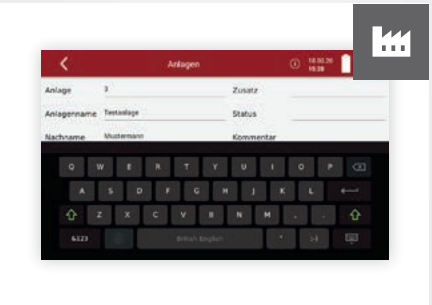

Manage facilities

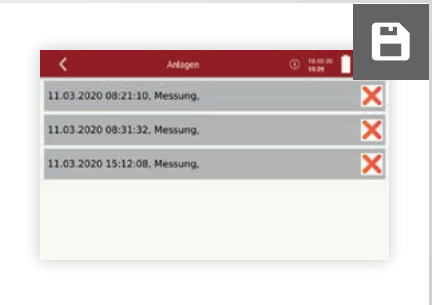

Save measurements by facility

High quality measurement technology

The combination of TCD (Thermal Conductivity Detector), Infrared measurement technology and electrochemical sensors of the VARIOluxx guarantees reliable analysis of large measuring ranges.

- Infrared sensors (NDIR) for CO_2, CO, CH_4
- Long-life sensor (EC) for O_2
- TCD for H_2
- Differential pressure measurement
- Temperature measurement of syngas

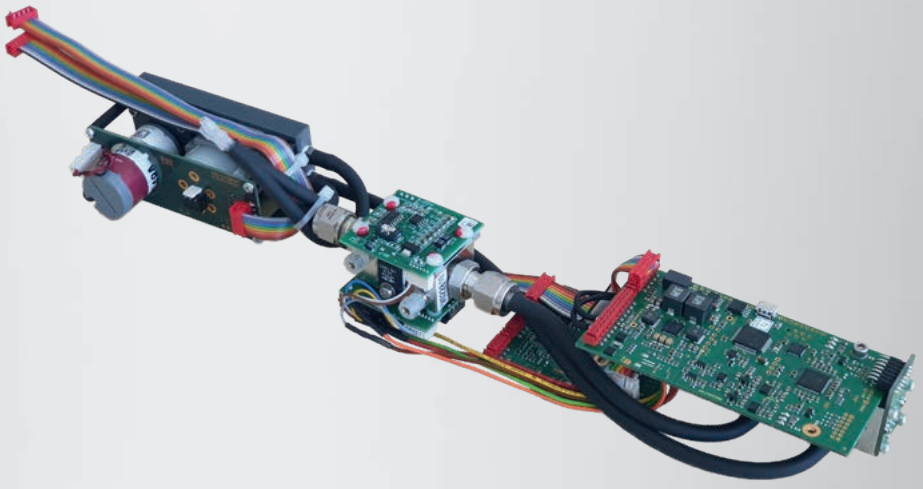

Practical accessories

For more flexibility

Portable syngas treatment (scrubbing) device

- for tar or heavy hydrocarbons removal

Industrial probe head

- with integrated heated filter, 160°C temperature regulation by the analyzer

Rugged "Pelicase" style transport case

- also usable for flight transportation

USB to Bluetooth converter set / USB to WiFi converter

- wireless data transfer to PC/ notebook with MRU4win
- WiFi for short distance and Bluetooth for up to 300m

PC software "MRU4Win"

- Software for Windows to visualize measure data, manage, export and print
- Connect multiple devices at the same time and read out live values
- Logging and saving live values
- Database with customer contacts, attachments and manage users
- Export measurement reports as PDF
- Documents with customized logo and print out the address
- Read out data storage, save measurements, print and save as PDF

VARIO*luxx*

Technical data

Gas measurement	Method	Measuring range min./max.*	Resolution	Accuracy**
O_2 – oxygen (Long-life)	ECS	0 ... 25,00 %	0,01 %	0,2 %
O_2 – oxygen	PM	0 ... 25,00 % / 100,00 %	0,01 %	0 ... 25 Vol-% ± 0,1 % 25 ... 100 Vol-% ± 0,2 %
CO – carbon monoxide	NDIR	0 ... 10,00 % / 100,00 %	0,01 %	± 0,1 % or 2 % reading
CO_2 – carbon dioxide	NDIR	0 ... 10,00 % / 100,00 %	0,01 %	± 0,3 % or 2 % reading
CH_4 – methane	NDIR	0 ... 10,00 % / 100,00 %	0,01 %	± 0,2 % or 2 % reading
H_2 – hydrogen	TCD	0 ... 10,00 % / 100,00 %	0,01 %	± 0,1 % or 2 % reading
H_2S – hydrogen sulphide	ECS	0 ... 2.000 ppm / 5.000 ppm	1 ppm	± 5 ppm or 5 % reading

Calculated components	
Calorific value N_2 balance	0... 50 MJ/m³ or MJ/kg
N_2 Balance	difference to 100%

Other measurements	Method	Measuring range	Resolution	Accuracy**
Stack gas temperature (T_{gas})	NiCrNi	0 ... 1,100 °C	1 °C	± 1 °C or 2 % reading
Ambient air temperature (T_{amb})	NiCrNi	0 ... 100 °C	1 °C	± 1 °C or 2 % reading
Differential pressure (Diff.press.)	Piezoresistive	–120 ... +120 hPa	1 Pa	± 2 Pa or 1 % reading
Flow velocity measurement (v)	Diff.press.	3 ... 100 m/s	1 m/s	± 1 m/s or 1 % reading
Emission calculations	software	mg/Nm³, reference to O_2, g/s, kg/h		

General technical data	
Operating system	LINUX
Display, operation	7" TFT (800 x 480 px) colour display, backlit, with touch pad
Data storage type	dynamic, internally 10,000 data sets, external USB stick
Interface to PC/notebook	Ethernet, WiFi, RS 485
Cable/wireless communication interface	RS 485, RJ45 (Ethernet), WiFi
Printer	external USB/WiFi printer
Analog output/input 4 ... 20 mA	8 channel out, 4 channel in, user configurable
System warm up time	30 minutes, typical
Mains free operation time	Li-Ion, 48 Wh, for standby 1 hour (optional additional battery, 48 Wh Li-Ion)
Operating conditions	+5 ... +45 °C; RH up to 95 % non condensing
Storage temperature	–20 ... +50 °C
Power supply	86 ... 265 Vac, 47 ... 63 Hz, 105 W (up to 600 W with heated gas sample line)
Protection class	IP20
Dimensions (W x H x D)	430 x 290 x 150 mm
Weight	approx. 8 kg only device, approx. 13 kg packed in bag with accessories

Data subject to change without notice. | ¹ EC = elektrochemical sensor, PM = paramagnetic sensor, NDIR = non-dispersive infrared spectroscopy
* overload range of ECS is usable only for short duration | ** which ever is larger | *** with hourly reset to zero | N-62300SYN-GB-K1-0M-0125

MRU – Competence in gas analysis. Since 1984.

MRU · Messgeraete fuer Rauchgase und Umweltschutz GmbH
Fuchshalde 4 + 8 + 12
74172 Neckarsulm-Obereisesheim
Phone +49 7132 99620 · Fax +49 7132 996220
info@mru.de · www.mru.eu

MRU representative: